

ELECTRIC BOLT – RD14 SERIES (Fail- Secure)


FEATURES

- Suitable for double swing door
- Intelligent Auto-Relock
- With lock and Door status sensor
- Built-in voltage spike suppressor
- Use jumper to select auto-lock time delay (0, 2.5, 5 sec.)
- Fail secure
- Built-in bi-color LED , Time delay
- Fixed on glass doors, wooden doors, iron gate & fireproof doors.
- Security type: Automatically unlocks the door when power off.
- Low Temperature, safe & Durable
- Low Power, Environmental Protection
- Easy to install and operate.



SPECIFICATION	
Lock Body Temperature	<40。 C (under room temperature 25。 C)
Bolt length	16mm (5/8")
Bolt dia	15.8mm (5/8")
Time Delay	0 , 3 , 6 , 9
Voltage	12VDC / 24VDC (option)
Current Draw	1.2A/12VDC : 0.68A/24VDC
Dss Relay	COM , NO , NC (MAX.3W ; 30VDC ; 0.2A)
Lss Relay	COM , NO , NC (MAX ; 30VDC ; 1A

DIMENSION

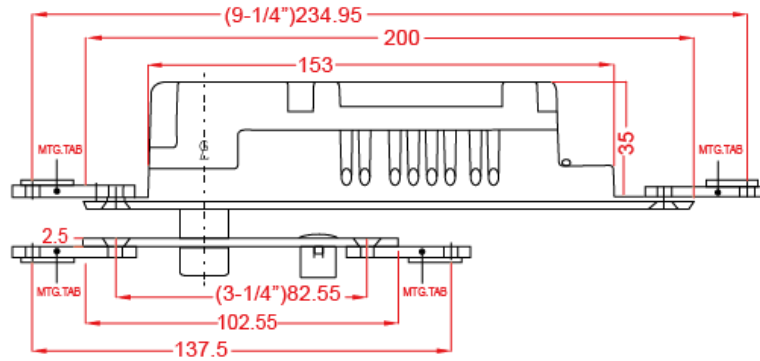

ORDERING INFORMATION

RD14270PL	Smart , Fail secure , With Lock status sensor , bi-color LED
RD14270PLD	Smart , Fail secure , With Lock status sensor , Door status sensor ,bi-color LED
RD14270PLC	Smart , Fail secure, bi-color LED, With Lock status sensor, Door status sensor, Lock cylinder