

ELECTRIC BOLT – RD14 SERIES (Fail-safe / Fail-Secure)


FEATURES

- Suitable for double swing door
- Fire resistant
- With lock and Door status sensor
- Built-in voltage spike suppressor
- Use jumper to select auto-lock time delay (0, 3, 6 sec.)
- Dual mode: Fail safe / Fail secure on site reversible
- Fixed on wooden doors, iron gate & fireproof doors.
- Security type: Automatically unlocks the door when power off.
- Low Temperature, safe & Durable
- Low Power, Environmental Protection
- Easy to install and operate.



SPECIFICATION	
Dual Mode	fail-secure / Fail-safe on site reversible
Monitor	double -door and lock status sensor
Timer	selectable 0 , 3 , 6 SEC
Cylinder Lock	for emergency opening
Face Plate Material	Stainless Steel
Voltage	12VDC~24VDC
Current Draw	Start : 1.5A/12VDC , 0.85A/24VDC, Standby : 0.3A/12VDC , 0.2A/24VDC

DIMENSION

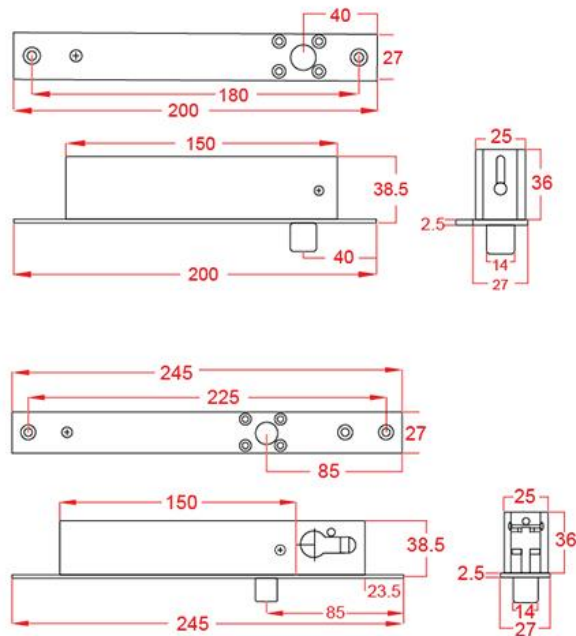

ORDERING INFORMATION

RD14280	Slim profile electric bolt W/Door, Lock status sensor
RD14280A	Slim profile electric bolt, W/Door, Lock status sensor, Lock cylinder