

ELECTRIC BOLT – RD14 SERIES FAIL SAFE

FEATURES

- Suitable for double swing door
- With lock and Door status sensor
- Built-in voltage spike suppressor
- Use jumper to select auto-lock time delay (0, 2.5, 5 sec.)
- Round plate type: easy to make appropriate installation holes




MODELS

RD14200: With lock and door status sensor

RD14200R: Round plate, with door and lock status sensor

SPECIFICATION	
Fail-safe	Locked when energized
Face Plate Material	Aluminium
Cover Plate	Stainless steel
Weight	0.9KG
Voltage	12VDC or 24VDC (option)
Current Draw	Pull-in : 1A / 12VDC
Holding	0.3A / 12VDC

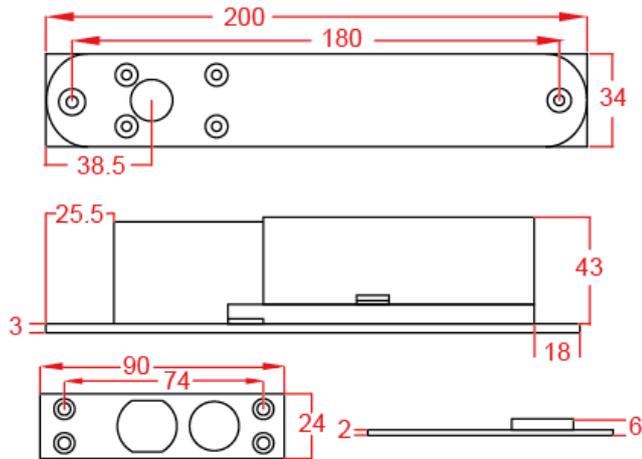

ORDERING INFORMATION

RD14200: Electric Bolt with Lock & Door status sensor

RD14200R: Electric Bolt with Round plate, Lock and door status sensor