

ELECTRIC BOLT – RD14 SERIES FAIL SAFE

FEATURES

- Suitable for double swing door
- With lock and Door status sensor
- Built-in voltage spike suppressor
- Use jumper to select auto-lock time delay (0, 2.5, 6 sec.)
- Round plate type: easy to make appropriate installation holes



MODELS


RD14203: With lock status sensor

RD14203S: With lock and door status sensor

RD14203SR: Round plate, with door and lock status sensor

SPECIFICATION	
Fail-safe	Locked when energized
Face plate Material	Aluminium
Cover plate	Stainless Steel
Weight	0.9KGS
Voltage	12VDC
Current Draw	Puli-in : 1A / 12VDC
Holding	0.3A / 12VDC

DIMENSION

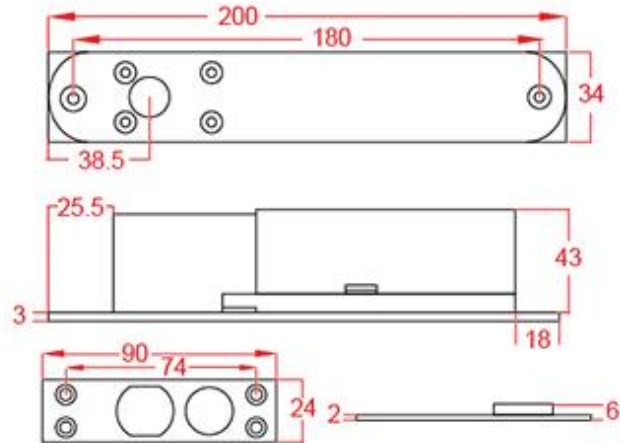

ORDERING INFORMATION

RD14203: Electric Bolt with Lock status sensor

RD14203S: Electric Bolt with Lock and door status sensor

RD14203SR: Electric Bolt with Round plate, Lock and door status sensor