

RD SERIES 1200P GATE LOCK

FEATURE

- For outdoor use (water-proof) - all inner components are well sealed and be protected from environmental damages.
- Three meters long power cable for convenient installation
- Horizontal or vertical installation



MODELS

- RDGL1200: Gatelock 1200P Unmonitored, Face mounted (203Lmm)
- RDGL1200S: Gatelock 1200P Unmonitored, Side mounted (220Lmm)
- RDGL1200R: Gatelock 1200P W/Lock status sensor, Face mounted (203Lmm)
- RDGL1200SR: Gatelock 1200P W/Lock status sensor, Side mounted(220Lmm)

SPECIFICATION

Stainless steel housing

Built-in voltage spike suppressor

Holding Force

1200LBS

Voltage

12V/24VDC (Selectable)

Current Draw


500mA/12V , 250mA /24V

Special Finish

Zinc (on the magnet & armature plate)

DIMENSION

- Magnet (RDGL1200): 203L*63.5W*41Dmm
- Armature Plate: 185L*61W*16T mm
- Magnet (RDGL1200S): 220L*63.5W*41Dmm

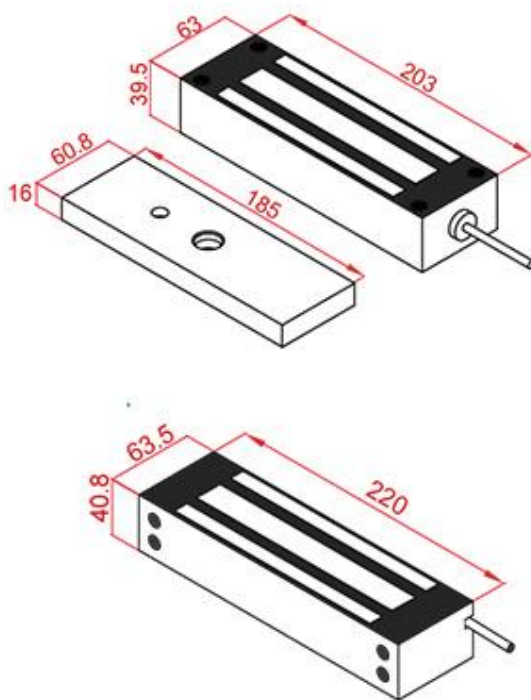

ORDERING INFORMATION

RDGL1200: Gatelock 1200P Unmonitored, Face mounted

RDGL1200S: Gatelock 1200P Unmonitored, Side mounted

RDGL1200R: Gatelock 1200P W/Lock status sensor, Face mounted

RDGL1200SR: Gatelock 1200P W/Lock status sensor, Side mounted