

RD SERIES 600P GATE LOCK

FEATURE

- For outdoor use (water-proof) - all inner components are well sealed and be protected from environmental damages.
- Three meters long power cable for convenient installation
- Horizontal or vertical installation

MODELS

- RDGL600: Gate lock 600P Unmonitored, Face mounted, Basic
- RDGL600S: Gate lock 600P Unmonitored, Side mounted, Basic
- RDGL600R: Gate lock 600P, Face mounted, W/Lock status sensor
- RDGL1600SR: Gate lock 600P, Side mounted, W/Lock status sensor



SPECIFICATION

Stainless steel housing

Built-in voltage spike suppressor

Holding Force

600LBS

Voltage

12V/24VDC (Selectable)

Current Draw



500mA/12V , 250mA /24V

Special Finish

Zinc (on the magnet & armature plate)

DIMENSION

- Magnet (RDGL600): 203L*44W*40H mm
- Magnet (RDGL600S): 203L*44W*38.5H mm
- Magnet (RDGL600SR-24V): 203L*44W*40H mm
- Armature Plate: 185L*38W*12.5T mm

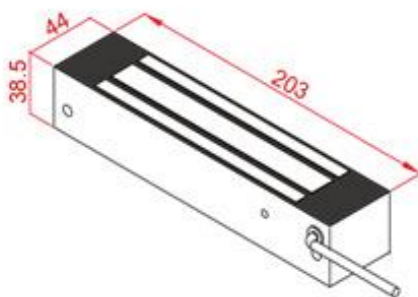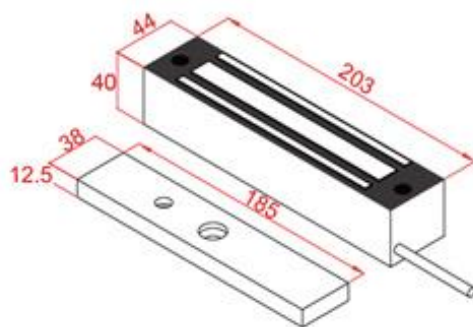

ORDERING INFORMATION

RDGL600: Gate lock 600P Unmonitored, Face mounted, Basic

RDGL600S: Gate lock 600P Unmonitored, Side mounted, Basic

RDGL600R: Gate lock 600P, Face mounted, W/Lock status sensor

RDGL1600SR: Gate lock 600P, Side mounted, W/Lock status sensor